



# POMI

## Miniwrap100

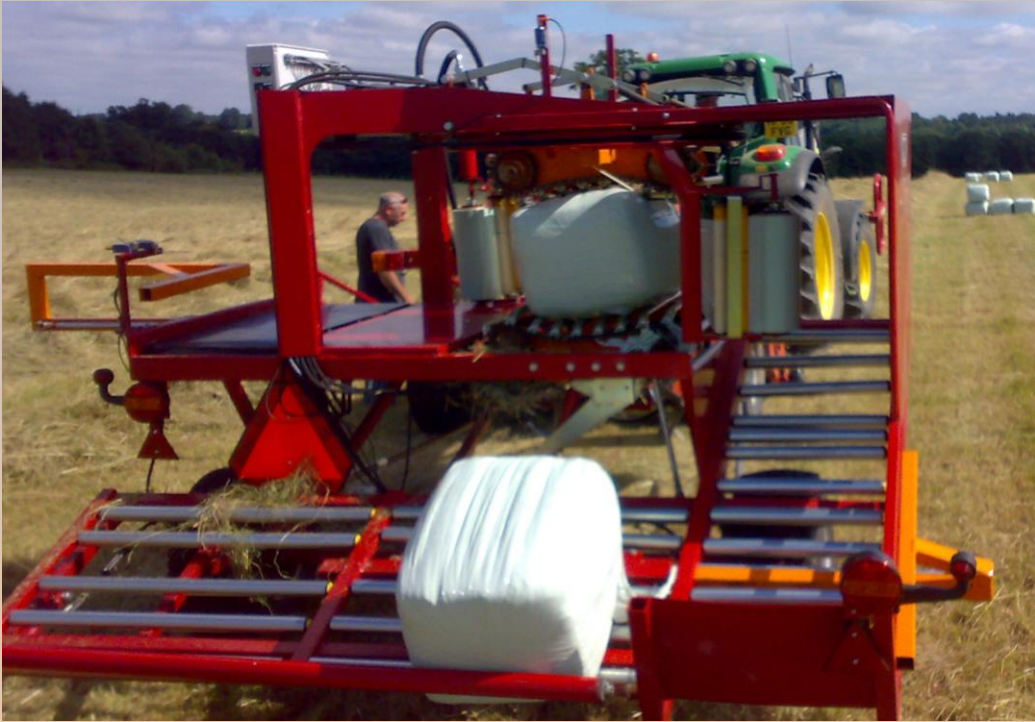

- Miniwrap100 is the best solution for higher efficiency and bigger earnings.**
- Wraps square bales immediately after baling.**
- Direct feed via rubber belt to roller table.**
- Optional equipment for stationary use with rubber roller table.**

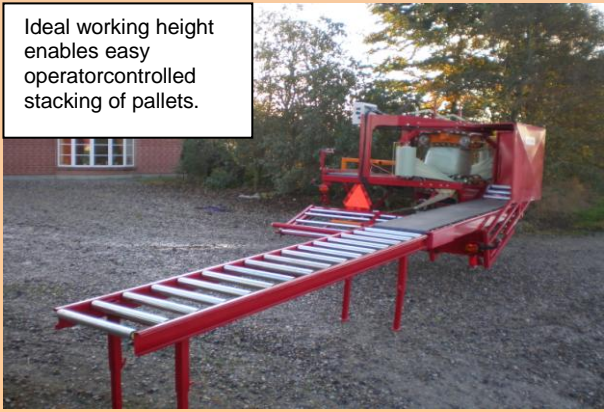

**Miniwrap100 is the best solution for higher efficiency and bigger earnings.**

**Miniwrap100 is reliable and easy to operate.**



**Placing of the film is easy (see ill.)  
Automatic cutting of film.**



**Automatic discharge of wrapped bales.  
Discharge of bales via rubber belt to roller table or 3-bale collecting table in field for easy pick-up.**



**Technical specifications:**

Length, total	3800 mm
Width, total	2650 mm
Height, total	2200 mm
Weight, total	850 kg
Working height with table	800 mm
Weight, film roll	12 kg
Capacity	80 - 100 bales/hr
Consumption of film	25 - 30 bales / roll at 8 layers *)
Rotation speed	125 rpm
Bale length	Between 550-1000 mm.
Bale compression	Max10 cm.
Hydraulic oil connection	1 double acting / Min. 200 bar, Min.55 L/min
Voltage	12 V 8 amp.

\*) 360 mm / 1500 m / 25µ



**POMI Industri ApS**

Abildvadvej 5, Thorup

**DK-9610 Nørager**

**Tlf. +45 98552000**

**Fax +45 98552200**

**[WWW.pomi.dk](http://www.pomi.dk)**

**Distributor:**