


POMI

Miniwrap100



Miniwrap100 is the best solution for higher efficiency and bigger earnings.

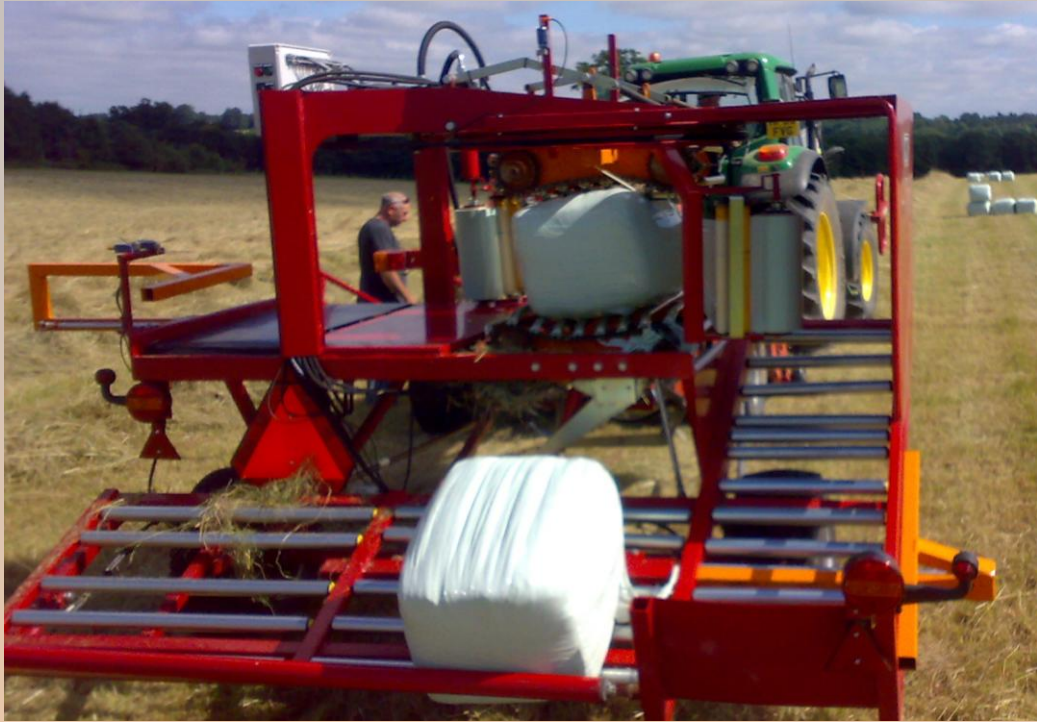

Wraps square bales immediately after baling.



Direct feed via rubber belt to roller table.



Optional equipment for stationary use with rubber roller table.



Miniwrap100 is the best solution for higher efficiency and bigger earnings.

Miniwrap100 is reliable and easy to operate.



**Placing of the film is easy (see ill.)
Automatic cutting of film.**



**Automatic discharge of wrapped bales.
Discharge of bales via rubber belt to roller table or 3-bale collecting table in field for easy pick-up.**



Technical specifications:

Length, total	3800 mm
Width, total	2650 mm
Height, total	2200 mm
Weight, total	850 kg
Working height with table	800 mm
Weight, film roll	12 kg
Capacity	80 - 100 bales/hr
Consumption of film	25 - 30 bales / roll at 8 layers *)
Rotation speed	125 rpm
Bale length	Between 550-1000 mm.
Bale compression	Max10 cm.
Hydraulic oil connection	1 double acting / Min. 200 bar, Min.55 L/min
Voltage	12 V 8 amp.

*) 360 mm / 1500 m / 25m μ



POMI Industri ApS

Abildvadvej 5, Thorup

DK-9610 Nørager

Tlf. +45 98552000

Fax +45 98552200

[WWW.pomi.dk](http://www.pomi.dk)

Distributor: